

# Multi Sentry

## MST-UPS System

**3:3** 30-200 kVA



**ONLINE**



**Tower**



**USB plug**



**SmartGrid ready**



**Supercaps UPS**



**Energy share**



**Service 1st start**



### HIGHLIGHTS

- Complete range 30-200 kVA
- Small footprint
- High efficiency up to 96.5%
- Zero impact source
- Flexibility of use
- Advanced communications

The Multi Sentry series is ideal for protecting data centres and telecommunications systems, IT networks and critical systems in general, where the risks connected with poor energy supply can compromise the continuity of activities and services. The Multi Sentry series is available in 30-40-60-80-100-125-160-200 kVA models with three-phase input and output and on-line double conversion technology in accordance with VFI-SS-111 classification (asset out in standard IECEN62040-3). Multi Sentry is designed and built using state-of-the-art technology and components. It has a fully controlled IGBT rectifier to minimize the impact on the grid.

It is controlled by a DSP (Digital Signal Processor) microprocessor, to provide maximum protection to the powered loads with no impact on downstream systems, and optimised energy savings.

#### Zero impact source

Multi Sentry solves installation problems in systems where the power supply has limited power available, where the UPS is supported by a generator or where there are compatibility problems with loads that generate harmonic currents; Multi Sentry has a zero impact on its power source, whether this is the mains power supply or a generator:

- input current distortion < 2.5%
- input power factor 0.99
- power walk-in function that ensures progressive rectifier start up
- start-up delay function, to restart the rectifiers when mains power is restored if there are several UPS in the system.

In addition, Multi Sentry plays a filtering and power factor correction role in the power network upstream of the UPS, as it eliminates harmonic components and reactive power generated by the power utilities.

### High efficiency

State-of-the-art three-level NPC inverters are used across the power range (30-200) to achieve an operating efficiency of 96.5%. This technology halves (50%) the energy dissipated in a year by traditional UPS, with an efficiency level of 92%. Its exceptional performance makes it possible to recover the capital investment cost in less than three years of operation.

### Battery care system

Proper battery care is critical to ensuring correct UPS operation in emergency conditions. The UPS battery care system consists of a series of features and capabilities to optimise battery management and obtain the best performance and operating life possible.

**Battery recharging:** Multi Sentry is suitable for use with hermetically sealed lead-acid (VRLA), AGM and GEL batteries and Open Vent and Nickel Cadmium batteries.

Depending on the battery type, different charging methods are available:


- One-level voltage recharge, typically used for widely available VRLA AGM batteries
- Two-level voltage recharge according to IU specification
- Charge blocking system to reduce electrolyte consumption and lengthen the life of VRLA batteries.

**Recharge voltage compensation** based on temperature in order to prevent excessive battery charges or overheating.

**Battery tests** to diagnose in advance any reduction in performance or problems with the batteries.

**Deep discharge protection:** during extended low-load discharges, the end-of-discharge voltage is increased - as recommended by battery manufacturers - to prevent damage or reduced battery performance.

**Ripple current:** recharge ripple current (residual AC component) is one of the main causes of reduced reliability and battery life. Using a high frequency battery charger, Multi Sentry reduces this value to negligible

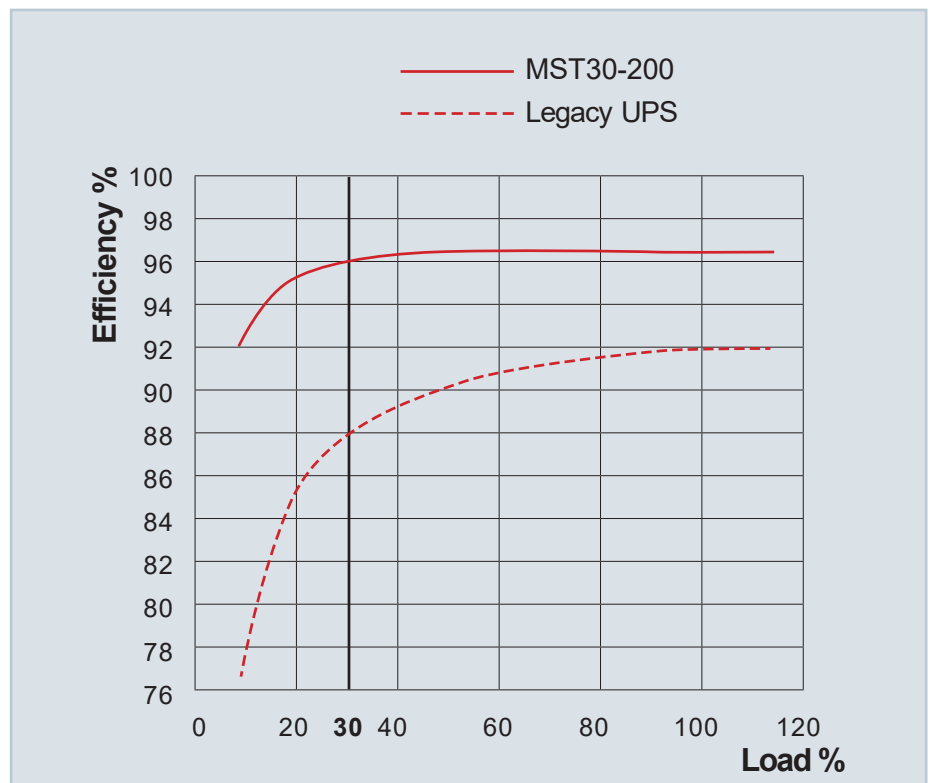

levels, prolonging battery life and maintaining high performance over a long period of time.

**Wide voltage range:** the rectifier is designed to operate within a wide input voltage range (up to -40% at half load), reducing the need for battery discharge and thus helping to extend battery life.

### Maximum reliability and availability

Distributed parallel configuration of up to 8 units per redundant (N+1) or power parallel system. The UPS continue to operate in parallel even if the connection cable is interrupted (Closed Loop).


### Low running costs

Advanced technology and use of high performance components, allows Multi Sentry to provide exceptional performance and efficiency, with a compact size:

- the smallest overall footprint is only 0.37 sqm for Multi Sentry 40 kVA with batteries
- the type of input stage (IGBT rectifier) ensures an input power factor close to 1 with low current distortion, avoiding the need for bulky and expensive filters
- unity output power factor for MST160 - 200 make it suitable to any data centre application ensuring full power availability no matter what the utilities power factor range (typically from 0.9 lagging to 0.9 leading)



- more active power than a traditional UPS, guaranteeing a greater margin when sizing UPS for potential future load increases.
- smart ventilation principle on MST 160-200 manages the number of operating fans and their speed according to room temperature and load level. This preserves the life span of the fans and at the same time we reduce noise level and overall power consumption for unnecessary UPS ventilation.

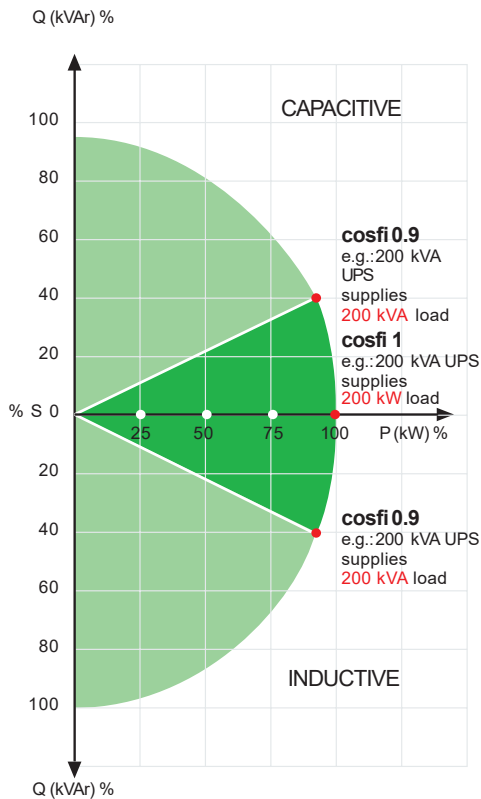

## Flexibility

With its flexible configuration, performance, accessories and options, Multi Sentry is suitable for use in a wide range of applications:

- suitable for powering capacitive loads, such as blade servers, without any reduction in active power from 0.9 lead to 0.9 lag
- On-line, Eco, Smart Active and Stand By Off operating modes - compatible with centralised power systems (CSS) applications.
- frequency converter mode
- configurable Energy Shares sockets to preserve runtime for the most critical loads or to be activated only when mains power fails
- Cold Start to switch on the UPS even when there is no mains power present
- MST30-40 version: cabinet (1320 x 440 x 850 mm HxWxD) for optimised solutions when medium to long-term runtimes are required.



Multi Sentry MST160-200

- optional temperature sensor for external battery cabinets, to assist recharge voltage compensation
- high power battery chargers to optimise charge time in the event of long runtimes
- optional dual input mains power supply
- isolation transformers for modifying the neutral earthing (separate power sources), or for galvanic isolation between the input and output
- 220 V three-phase IN/OUT version and 50/60 Hz frequency for 10-40 kVA power ratings
- different sized battery cabinets and capacities, for extended runtimes
- with the MST60-100 the UPS can be raised up to 25 cm from the ground to allow the cables to pass more freely to/from the UPS terminal board
- MST160-200 can be equipped with a side mounted top entry cabinet to arrange UPS cabling from the top.



Multi Sentry MST160-200 with top cable entry

## Advanced communications

Multi Sentry is equipped with a backlit graphic display (240x128 pixels) providing UPS information, measurements, operating states and alarms in different languages. It can also display waveforms and voltage/current forms.

The default screen displays UPS status, graphically indicating the status of the various assemblies (rectifier, batteries, inverter, bypass).

- Advanced multi-platform communications for all operating systems and network environments: PowerShield<sup>3</sup> monitoring and shutdown software included for Windows operating systems 10, 8, 7, Hyper-V, 2016, 2012, and previous versions, Mac OSX, Linux, VMWare ESXi, Citrix Xen Server and other Unix operating systems




MST60-100 with Soclebox (h: 1850 mm)

- Compatible with TeleNetGuard remote monitoring service
- RS232 serial and USB ports
- 3 slots for the installation of optional communications accessories such as network adapters, potential free contacts, etc.
- REPO Remote Emergency Power Off for switching off the UPS via a remote emergency button
- Input for the connection of the auxiliary contact of an external manual bypass
- Input for synchronisation from an external source
- Graphic display panel for remote connection.

## BATTERY BOX

MODELS	BB1320 480-T4 / BB1320 480-T5 BB1320 480-T2 / AB1320 480-T5	BB1600 480-S5 / AB1600 480-S5	BB1900 480-V6 / BB1900 480-V7 BB1900 480-V8 / BB1900 480-V9 AB1900 480-V9
UPS MODELS	up to 60 kVA	up to 80 kVA	up to 200 kVA
Dimensions WxDxH (mm)	400x815x1320 <i>BB1320 480-T4 Not available for MST40-60</i> <i>BB1320 480-T2 Not available for MST60</i>	605x750x1600	860x800x1900 <i>BB1900 480-V6 / BB1900 480-V7</i> <i>Not available for MST160-200</i>

## DETAILS

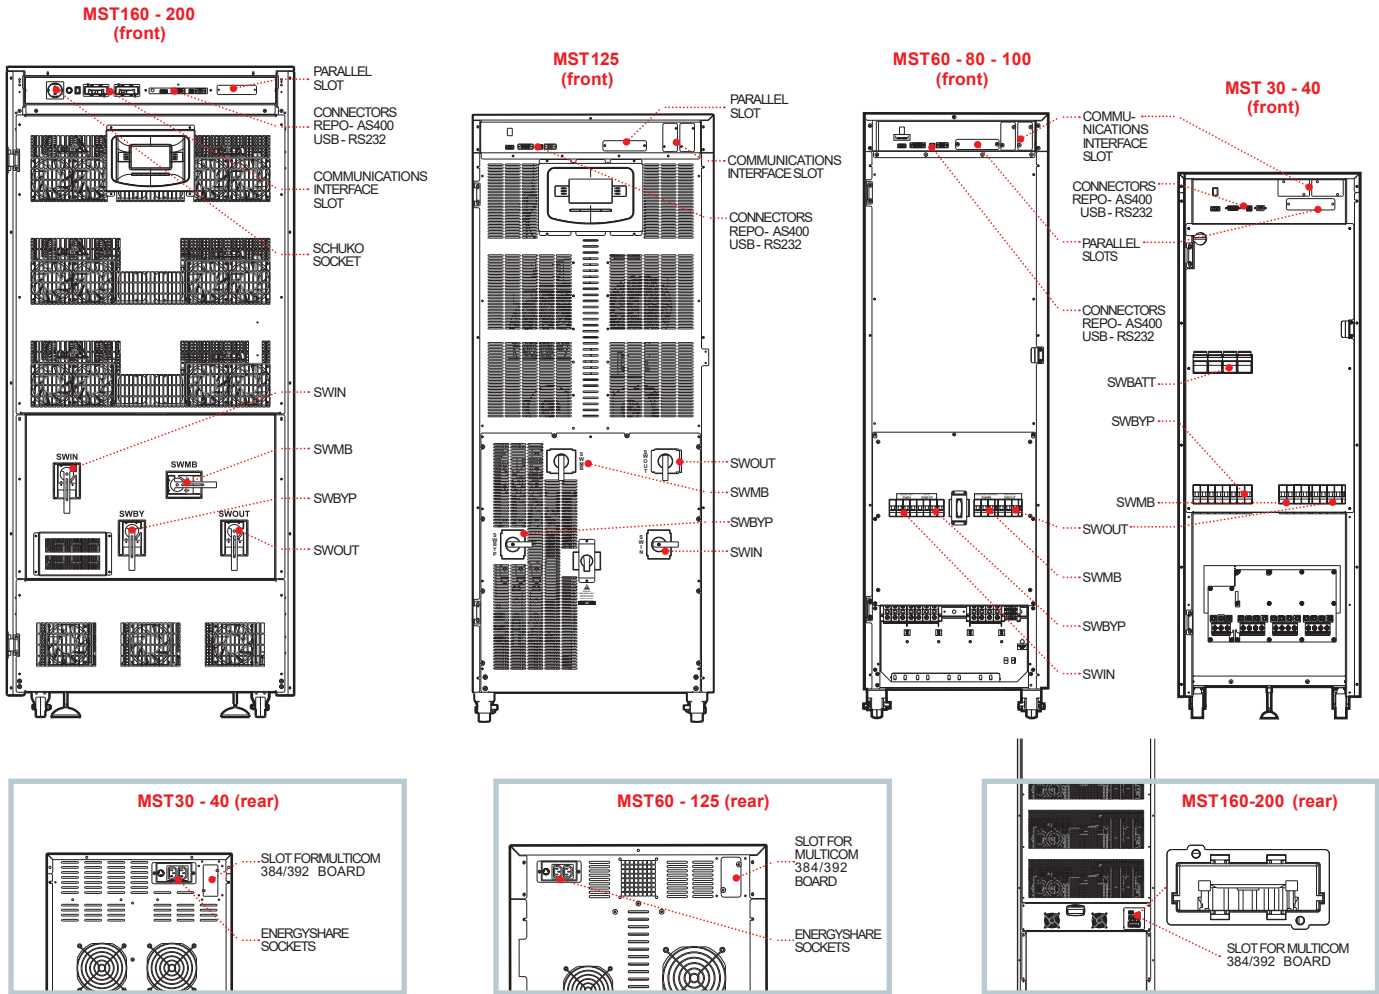

## OPTIONS

### SOFTWARE

PowerShield<sup>3</sup>  
PowerNetGuard

### ACCESSORIES

NETMAN204  
MULTICOM302  
MULTICOM352  
MULTICOM372  
MULTICOM384  
MULTI/O

### MULTIPANEL

MBB 100 A

### PRODUCT ACCESSORIES

Battery temperature sensor  
Powerful battery charger  
Programmable relay board  
MULTICOM392  
UPSwith internal isolation  
transformers (30-40 kVA)  
UPS220 V IN/OUT

### IP rating IP31/IP42

Socle Box for MST60-100

Energy Share sockets

Top cable entry for MST160-200

Eyebolts kit for MST160-200



MODELS	MST 30 <sup>BAT</sup>	MST 40 <sup>BAT</sup>	MST 60	MST 80	MST 100	MST 125	MST 160	MST 200
<b>INPUT</b>								
Nominal voltage	380-400-415 Vac three-phase + N							
Nominal frequency	50/60 Hz							
Voltage tolerance	400 V ±20% @ full load							
Frequency tolerance	40 - 72 Hz							
Powerfactor at full load	0.99							
Current distortion	THDI ≤ 3%						THDI ≤ 2.5%	
<b>BYPASS</b>								
Nominal voltage	380-400-415 Vac three-phase + N							
Number of phases	3 + N							
Voltage tolerance (Ph-N)	180 - 264 V (selectable)							
Nominal frequency	50 or 60 Hz (selectable)							
Frequency tolerance	±5% (selectable)							
Bypass overload	125% for 60 minutes, 150% for 10 minutes							
<b>OUTPUT</b>								
Nominal power (kVA)	30	40	60	80	100	125	160	200
Active power (kW)	27	36	54	72	90	112.5	160	200
Power factor	0.9						1	
Number of phases	3 + N							
Nominal voltage	380-400-415 Vac three-phase + N (selectable)							
Static variation	± 1%							
Dynamic variation	± 3%							
Crest factor	3 : 1 I <sub>peak</sub> /I <sub>rms</sub>							
Voltage distortion	≤ 1% with linear load / ≤ 3% with non-linear load							
Frequency	50/60 Hz							
Frequency stability during battery operation	0.01%							
<b>BATTERIES</b>								
Type	VRLAAGM/GEL/NiCd/Li-ion/Supercaps							
Recharge time	6 hours							
<b>INFO FOR INSTALLATION</b>								
Weight without batteries (kg) (MCT/MST)	135	145	190	200	220	250	450	460
Dimensions (WxDxH)(mm)	440 x 850 x 1320		500 x 850 x 1600			650 x 840 x 1600	850 x 1050 x 1900	
Communications	3 slots for communications interface / USB/ RS232							
Operating temperature	0 °C/ +40 °C							
Relative humidity	90% non-condensing							
Colour	Dark grey RAL7016							
Noise level at 1 m [dBA±2] (Smart Active)	< 40 dBA		< 63 dBA				< 50 dBA	
IP rating	IP20							
Smart Active efficiency	up to 99%							
Standards	European Directives: L V 2014/35/EU low voltage Directive EMC 2014/30/EU electromagnetic compatibility Directive Standards: Safety IEC EN 62040-1; EMC IEC EN 62040-2 Classification in accordance with IEC 62040-3 (Voltage Frequency Independent) VFI- SS- 111							
Moving the UPS	castors (30 - 200 kVA)							

<sup>BAT</sup> Also available with internal batteries